

# Design and Investigation of High Voltage Isolated Silicon-Controlled Rectifier (SCR) Gate Driver

Kostadin Milanov<sup>1,2</sup>, Mintcho Mintchev<sup>2</sup>, Hristo Antchev<sup>3</sup>

<sup>1</sup>Department of Electrical Apparatus, Faculty of Electrical Engineering, Technical University - Sofia, Sofia, Bulgaria

<sup>2</sup>Department of Electrical Apparatus, Faculty of Electrical Engineering, Technical University - Sofia, Sofia, Bulgaria

<sup>3</sup>Power Electronics Department, Faculty of Electronic Engineering and Technologies, Technical University - Sofia, Sofia, Bulgaria

## Email address:

k.milanow@tu-sofia.bg (K. Milanov), mintchev@tu-sofia.bg (M. Mintchev), hristo\_antchev@tu-sofia.bg (H. Antchev)

## To cite this article:

Kostadin Milanov, Mintcho Mintchev, Hristo Antchev. Design and Investigation of High Voltage Isolated Silicon-Controlled Rectifier (SCR) Gate Driver. *American Journal of Electrical Power and Energy Systems*. Special Issue: Improvement of Energy Efficiency in the Conversion of Electrical Energy by Means of Electronic Converters. Vol. 4, No. 6-1, 2015, pp. 19-22. doi: 10.11648/j.epes.s.2015040601.14

**Abstract:** The present article examines the design and implementation specifics of High Voltage Isolated Driver for control of serially connected SCR. The driver features the use of current transformers for the impulses applied to the control electrodes of simple-connected primary coils, as well as control pulses transmission through optical fibre. Results from the experimental study are provided.

**Keywords:** Silicon-Controlled Rectifier, Driver, High Voltage Isolation

## 1. Introduction

The correct and reliable operation of the controlled rectifiers depends to a great extent on their management system operation, part of which are the thyristor control drivers [1]. The latter must provide control pulses with the required waveform and parameters at minimum power loss on its elements. The available literature describes generally drivers when using pulse voltage transformers [2]. A summary of the possible solutions for different devices has been made in [3]. In practice high supply voltages require serially connected thyristors, which imposes also the corresponding requirements to their control drivers. A more systematic consideration of the possible circuit solutions is presented in [4]. The control of serially connected thyristors is described in [5]. A driver for serially connected thyristors, using current transformers, is proposed in [6]. The proposed connection of primary coils is complicated and creates implementation difficulties.

This article describes the specificities of driver design and implementation for serially connected thyristors, based on current transformers with common primary coils and simplified connection. Each of them consists of a wire, passing through the transformers' cores in different direction. Part 2 of the article proposes a complete circuit diagram and driver operation description, while part 3 is dedicated to

current transformers' design and implementation. Part 4 shows the results from the experimental study of the driver.

## 2. Operation Description

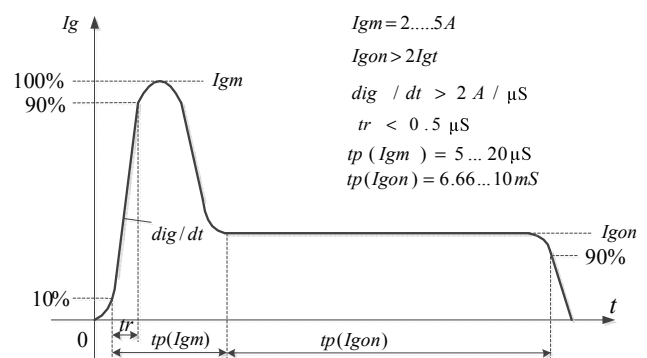


Figure 1. Requirements to the control pulse waveform.

The requirements to the control pulse waveform for the particular thyristor type T123-160 are shown on fig.1 [7]. They are typical for all rectifying thyristors. Fig.2 presents a schematics of the driver. For the control of each thyristor are used two current transformers - CTr1 and CTr2. Both wires forming the primary coils pass through the cores of the transformers in different direction, as shown on fig.2. Therefore, when the current flows through one of the primary



can operate – B. The value of the current through the primary coil of the current transformers  $I_{1m}$  should be also selected.

The number of the transformers secondary coils is determined by the expression:

$$\text{For CTr1 - } w_{21} = \frac{I_{1m}}{I_{gm}} \quad (1)$$

and for CTr2 respectively

$$w_{22} = \frac{I_{1m}}{I_{gon}} \quad (2)$$

The section of the transformers'  $A_e$  magnetic cores is determined by an expression, giving the relationship between the voltage on the control electrode at the respective current, the current flow duration and the magnetic induction with which the respective magnetic core can operate.

$$A_e = \frac{U_g t_p}{2w_2 B} \quad (3)$$

In the case of the discussed sample, transformer CTr1 has a secondary coil of 7 windings and a magnetic core of nanocrystalline alloy with section  $0,1 \cdot 10^{-4} \text{m}^2$ , while transformer CTr2 has a secondary coil with 40 windings and electrical steel magnetic core section of  $4,5 \cdot 10^{-4} \text{m}^2$ . The current through the primary coils of both transformers, while generating control pulse, is equal to 20A. The demagnetizing current does not exceed 5A.

### 4. Experimental Investigation

The driver thus presented is used for the implementation of a rectifier with output voltage 6.5 kV and current up to 30 A. The supply voltage of the rectifier is  $3 \times 4.5 \text{ kV}$ . A three-phase bridge circuit has been used, each thyristor consisting of 4 serially connected thyristors as shown on fig. 2. All four thyristors form a driver controlled thyristor block.

Fig. 3 shows a photo of one of the thyristor blocks together with the current transformers and the elements in their secondary coils.



Figure 3. General view of a thyristor block with the current transformers and the elements thereto.

Fig. 4 shows 3 drivers (for one of the rectifier thyristor groups - anode or cathode), together with the power supplies elements. Fig.5 shows the experimentally captured control pulse waveform for one of the serially connected thyristors. The waveform of the current is with ratio 100mV/A. The measured parameters of the controlling pulse are as follows:

$$I_{gm} = 2.5A; I_{gon} = 400mA; \frac{di_g}{dt} = 2.5 A/\mu S; t_r = 0.4\mu S;$$

$$t_p(I_{gm}) = 20\mu S; t_p(I_{gon}) = 6.7mS$$



Figure 4. General view of the drivers for one thyristor group together with the power supplies.

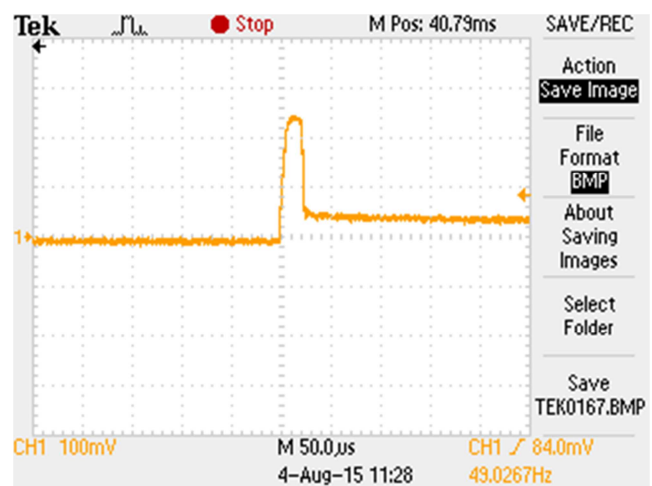
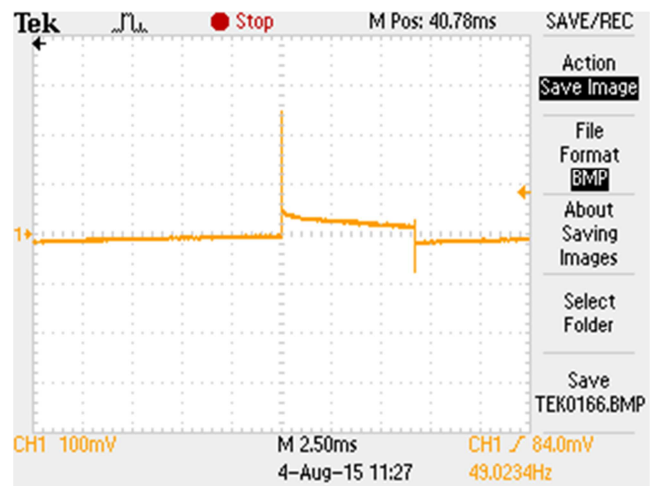


Figure 5. Experimental control pulse waveform for one of the thyristors.

### 5. Conclusion

The present article describes a high voltage isolated driver for serially connected thyristors, using current transformers. A special feature of the transformers is the simplified

construction of the primary coils, consisting of a single wire each. Each thyristor uses two current transformers, one of which transmits the initial peak of the controlling short duration pulse, and the other – the set value of the longer duration controlling pulse. The experimental investigation and the use of the proposed driver in a controlled thyristor rectifier with 6.5kV output voltage and 30A current, show that the required control pulses waveform and reliable operation have been achieved.

---

## References

- [1] SARI Energy, HVDC Control System-Overview, derived from [www.sari-energy.org](http://www.sari-energy.org) 25 July 2015.
- [2] Mohan N, Undeland T., Robbins W., Power electronics: Converters, Applications and Design: 3<sup>rd</sup> Edition, 2003, John Wiley and Sons.
- [3] Afsharian J., B. Wu, Zargari N., Self-powered Supplies for SCR, IGBT, GTO and IGCT Devices: A Review of the State of the Art, Canadian Conference of Electrical and Computer Engineering, CCECE'09, 2009, pp.920-925.
- [4] Wahl F. P., Firing Series SCRs at Medium Voltage: Understanding the Topologies Ensures the Optimum Gate Drive Selection, derived from [www.researchgate.net](http://www.researchgate.net) 15 July 2015.
- [5] Geun-Hie Rim, Shenderey S., Series Connection of Thyristors with Only One Active Driver for Pulsed Power Generation, proceedings of 29<sup>th</sup> Annual Conference of the IEEE Industrial Electronics Society, IECON'03, Vol.1, 2003, pp.107-116.
- [6] Applied Power Systems, BAP1289 High Voltage Isolated SCR Gate Driver, Derived from [www.appliedps.com](http://www.appliedps.com) 02 July 2015.
- [7] Elecrovipyritel, Phase Control Thyristor T123-160, Derived from [www.elvpr.ru](http://www.elvpr.ru) 29 July 2015.
- [8] Avago Technologies, HFBR0501-Series Versatile Link The Versatile Fiber Optic Connection, Derived from [www.avagotech.com](http://www.avagotech.com) 10 July 2015.
- [9] Microchip, TC4421/TC4422 9A High-Speed MOSFET Drivers, Derived from [www.microchip.com](http://www.microchip.com) 28 July 2015.