

# Application Effect Analysis of Image Fusion Methods for Extraction of Shoreline in Coastal Zone Using Landsat ETM+

Jo Jong-Song\*, Cha Jong-Hun

Department of Earth and Environmental Science, Kim Il Sung University, Pyongyang, Democratic People's Republic of Korea

## Email address:

ryongnam22@yahoo.com (Jo Jong-Song)

\*Corresponding author

## To cite this article:

Jo Jong-Song, Cha Jong-Hun. Application Effect Analysis of Image Fusion Methods for Extraction of Shoreline in Coastal Zone Using Landsat ETM+. *International Journal of Atmospheric and Oceanic Sciences*. Vol. 1, No. 1, 2017, pp. 1-6. doi: 10.11648/j.ijaos.20170101.11

**Received:** September 24, 2016; **Accepted:** November 14, 2016; **Published:** December 21, 2016

---

**Abstract:** Extraction of shoreline in coastal zone is important for coast protection and management. This paper presents extracting the shoreline with fusion images, which are obtained using various image fusion methods such as IHS transform, Brovey Transform, Multiplicative, Principle Component, Wavelet Resolution Merge. Artificial constructions (e.g. coastal embankments), islands, lakes, tidal mudflats and estuaries have been selected as evaluation objects, shorelines of which are extracted and analyzed. The result indicates that shoreline extraction effect by the Principle Component method is best among other methods.

**Keywords:** Image Fusion, Shoreline, Landsat ETM+

---

## 1. Introduction

The extraction of shoreline, boundary between sea and land, is important to study the coastal zone from satellite images. When shoreline is determined correctly, the seashore changes can be detected and data that are necessary for reclamation or use of tidal mudflat can be provided.

The fact that area of the seashore is wide and change is serious makes it very difficult to determine the shoreline by special field survey and observation. Therefore, the methods of shoreline detection by Remote Sensing have been studied widely [6-10, 13].

García-Rubio et al. [7] extracted shoreline from SPOT images using an unsupervised classification (ISODATA).

Because Landsat TM image has comparatively high spatial resolution and spectrum resolution and it has a lot of information it is used as basic data for research on resources of the earth and environment widely all over the world.

Some successes were achieved in studying shoreline detection using TM image.

Ghoneim et al. [8] used a segmentation technique to extract shoreline from the mid-infrared channel of MSS, TM/ETM+.

Kong et al. [10] applied an interactive interpretation technique combining an automatic boundary

detection algorithm with human supervision to detect the shoreline in MSS, TM/ETM+ images.

Kloiber, et al. [9] extracted the shoreline by using unsupervised classification after combining TM image with aerial image.

Frazier et al. [6] studied a method of detecting water body and mapping from TM image and McFeeters [13] enhanced information related to water from satellite images using Normalized Difference Water Index (NDWI).

Due to limitation of spatial resolution of TM image the shoreline detection could not be made further accurate. Therefore, shoreline detection accuracy can be advanced by using high space-spectral resolution image by fusing TM images and satellite images with high spatial resolution. Some researchers have suggested effective methods of image fusion [15].

Generally, there is RGB-IHS transform, Brovey Transform, Multiplicative, Principle Component, Wavelet Resolution Merge in image fusion methods.

The RGB-IHS transform method transforms every pixel in the RGB space to the IHS space, then matches the component I with histogram of the High resolution Pan image. And this makes the RGB fusion image by inverting

histogram-matched Pan image with components H, S separated [1, 2, 5, 16].

In the Principle Component method [14, 16], the first component image is obtained by the Principle Component analysis for multi-spectral bands image at first. Next, it matches the mean and standard deviation values of the high resolution image to the first component image, stretching high resolution image to be fused. Then it replaces the first component image with the high resolution image, and the higher spatial resolution multi-spectral image is obtained by Inverse Principle Component [2].

The Multiplicative method fuses two images that have different spatial resolutions by using multiplication calculation [3, 4].

$$(DN_{i\_m})(DN_h) = DN_{i\_new}$$

Where,  $i$  is the number of bands,  $DN_{i\_new}$  is a value of  $i$  bands after fusion,  $DN_{i\_m}$  is a value of  $i$  bands of various band images and  $DN_h$  is brightness value of high resolution image.

The Brovey Transform makes fusion between images that have three bands and high resolution image by using the following equation [12].

$$\begin{cases} R' = \frac{R}{R+G+B} Pan \\ G' = \frac{G}{R+G+B} Pan \\ B' = \frac{B}{R+G+B} Pan \end{cases}$$

Where,  $R$ ,  $G$ ,  $B$  are pixel brightness values of red, green, blue bands respectively, pan is brightness value of high resolution image and  $R'$ ,  $G'$ ,  $B'$  are pixel brightness values of red, green, blue bands respectively after fusion in various band images.

The Wavelet fusion method is based on the Wavelet transform [17].

The Wavelet transform makes analysis of signal information easy by operation that disjoints complex signal blocks of different criteria.

Wavelet transform is similar to Fourier transform. In the Fourier transform, long continuous (sine and cosine) waves are used as the basis. The wavelet transform uses irregular, asymmetric "wavelets" as basic functions and analyzes images in different scales. So, it overcame weakness of local analysis ability of Fourier transform which has not high local analysis ability [9].

Through the wavelet transform, the image is presented feature parameters of original image by decomposing to each of the waveforms [11]. Therefore, the image fusion based on the wavelet transform can use different fusion methods for different feature parameters so that the better fusion effect can be obtained.

These fusion methods have advantages and disadvantages. In this study, these fusion methods are applied to shoreline

detection and the results are compared and analyzed.

## 2. Study Area

The coastal zone includes coastal embankments, tidal mudflats, dunes and the big and small mouths of rivers.

A coastal embankment can be considered to be the constant shoreline. New tidal mudflat can be formed outside coastal embankments.

In tidal mudflat area, the boundary between sea and land cannot be indicated clearly because of reflection features of bottom material and low regions of mudflat affect the shoreline detection because water exists there at ebb tide.

The suspended materials such as suspended sand make it difficult to extract the shoreline in the mouths of rivers.

The effects of noise exclusion and shoreline detection of fusion methods are compared by selecting regions that have various topographic objects in this paper.

The coastal zone that includes the rivers, islands, lakes and tidal mudflats is selected for the study area (Figure 1).

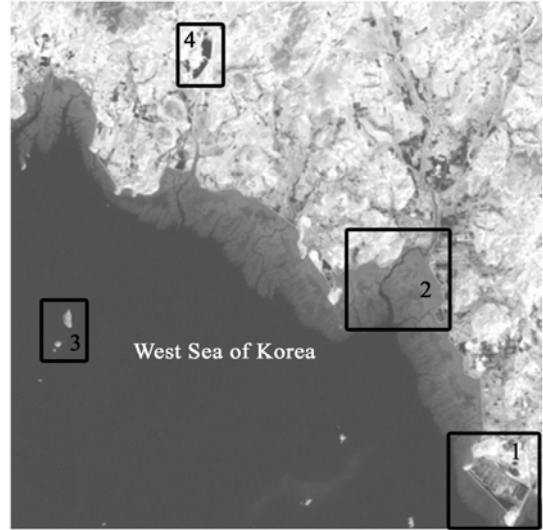


Figure 1. The study areas.

(Area 1 indicates the coastal embankment zone, Area 2 indicates the estuary zone, Area 3 indicates the island zone, Area 4 indicates the lake zone)

## 3. Methods and Results

Reflectance of seawater is not higher than reflectance of other objects in visible bands (480-580 $\mu$ m). Most radiation entered in seawater is absorbed over 740 $\mu$ m. Thus, many researches into water have been performed in visible bands generally. As water has strong absorption feature in infrared bands (740-2500 $\mu$ m), this range of band is used a lot for shoreline detection.

The Normalized Difference Water Index (NDWI) has been used a lot up until now in shoreline detection [13]. The Modified Normalized Difference Water Index (MNDWI) defined below is used to overcome NDWI's limitation and to get the shoreline more correctly.

$$MNDWI = \frac{Green - SIR}{Green + SIR}$$

Where, *Green* is the green band reflectance and *SIR* is the short infrared band reflectance. These are respectively equivalent to 2 and 5 bands in LANDSAT TM images.

Effectiveness analysis of fusion methods has been done as follows.

First, the atmospheric correction and the sun height correction are made for satellite images.


Second, fusion between Pan Band's image and other band

images of Landsat ETM+ are completed by each fusion method. Thus, when fusing satellite images from different sources, the geometric correction between images is not required. 7, 5, 2 bands are used to calculate MNDWI in cases of the IHS Transform and the Brovey Transform.

Third, the shoreline is extracted by calculating MNDWI index in obtained fusion images.

Fourth, the detection effects of islands, lakes, tidal mudflats, estuaries and artificial construction boundaries are compared.

The extraction results of coastal embankments are as follows (Figure 2).

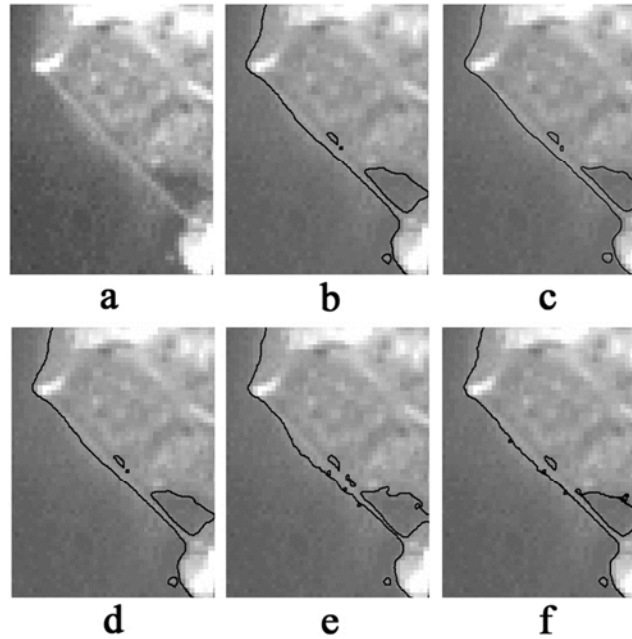


a) Source, b) Brovey, c) IHS, d) Multiplicative, e) PC, f) Wavelet

**Figure 2.** The result of coastal embankment extraction.

As shown in figure 2, all methods detected boundary of a coastal embankment nearly similarly. Relatively, the Principle Component method and the Wavelet Resolution Merge show more clearly details of area where water exists in interior coastal embankment than other methods. The detection

results of the IHS transform, Brovey Transform, Multiplicative are very similar.

Figure 3 shows the extraction result of shoreline in the estuary.

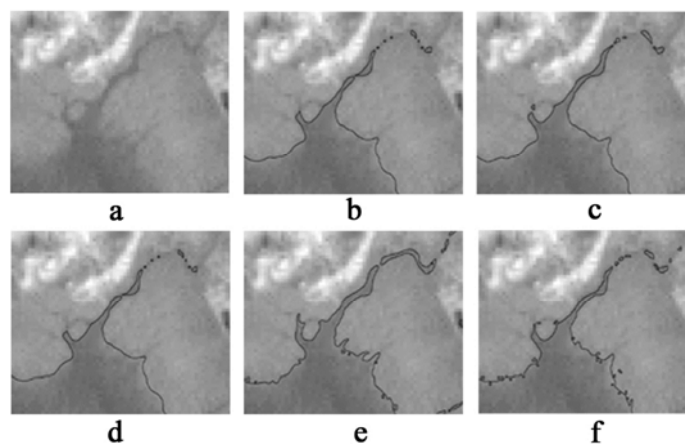


a) Source, b) Brovey, c) IHS, d) Multiplicative, e) PC, f) Wavelet

**Figure 3.** Shoreline extraction result in the estuary.


As figure3 shows, the Principle Component and the Wavelet Resolution Merge exhibit details of topography better in the estuary.

Figure 4 and 5 show results of the extracted boundaries of the island and the lake.

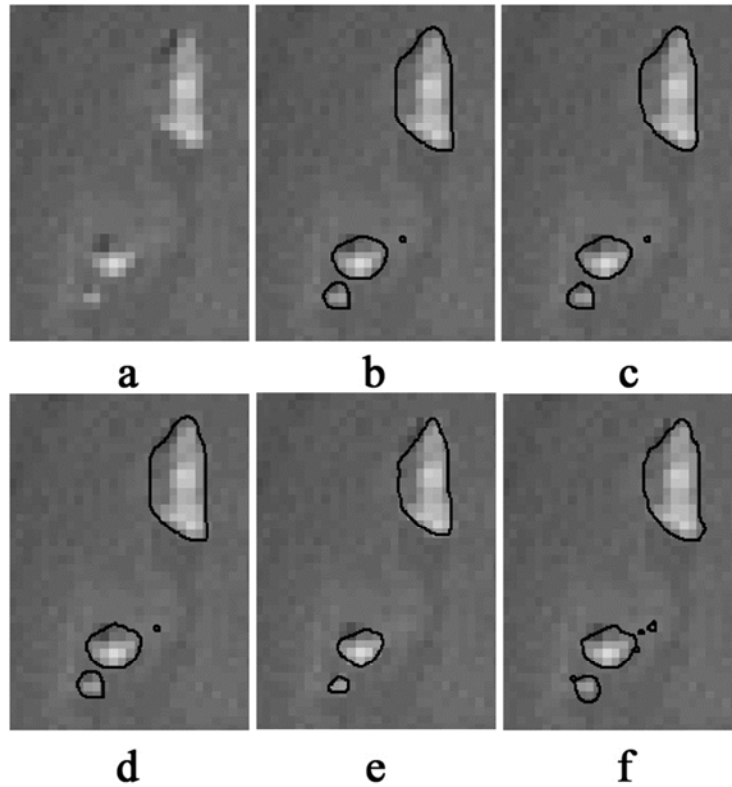

a) Source, b) Brovey, c) IHS, d) Multiplicative, e) PC, f) Wavelet

Figure 4. Extraction results of island boundary.

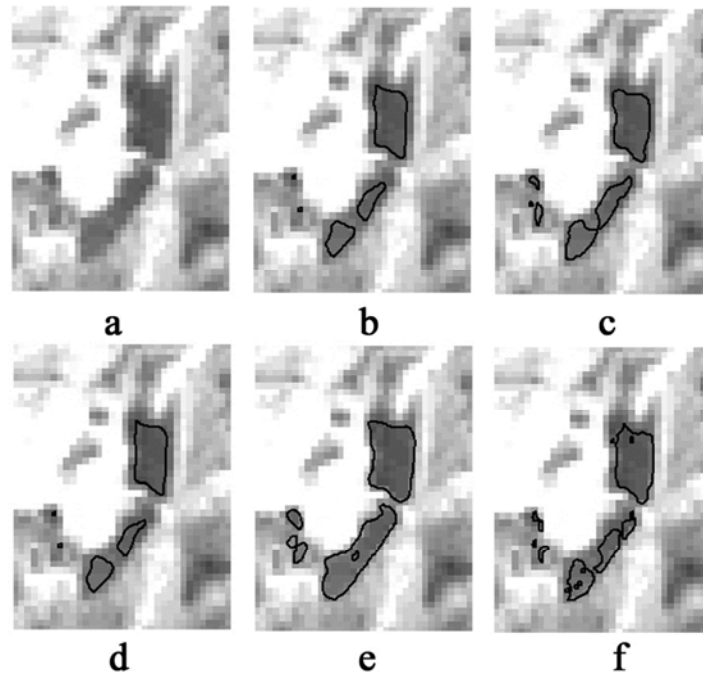

a) Source, b) Brovey, c) IHS, d) Multiplicative, e) PC, f) Wavelet

Figure 5. Extraction results of lake boundary.

To compare accuracy of every method, the boundaries of islands, lakes, estuary and coastal embankments are extracted in high resolution images and used them as a standard.

The relative errors between the shoreline extracted from the high resolution image and the shorelines extracted from fused images are shown in Table 1.

**Table 1.** Comparison of relative errors for shoreline extraction by image fusion methods.

Fusion Method	Lake area/%	Island area/%	Tidal mudflat area before the coastal embankment/%	Detail Description
IHS	0.37	0.16	0.08	medium
Brovey	0.51	0.17	0.08	medium
Multiplicative	0.53	0.17	0.08	medium
PC	0.1	0.1	0.03	high
Wavelet	0.36	0.13	0.05	high

As shown in Table 1, the shoreline extracted from fused images by the Principle Component method has a smaller error than all the other methods, the relative error of the estimated result is 0.1% for the area of lakes or islands, and it is 0.03% for the tidal mudflat area before the coastal embankment.

Except for the Principle Component method, the relative error of the Wavelet Resolution Merge is smaller than all the others.

The relative errors of IHS transform, Brovey transform and Multiplicative are almost the same and their accuracy is relatively lower than that of PC and Wavelet.

## 4. Conclusion

In this paper, the detection accuracy of shoreline can be lower than studying individual objects because shoreline is detected on the enormous seashore.

However, the area of study area is set widely and the fusion methods are applied because the shoreline detection in satellite image did not treat the limited regions or the individual objects.

Result shows that fusion method by the Principle Component analysis makes relatively small errors and exhibits details of topography better than all the other methods. Also, the error of the Wavelet Resolution Merge is smaller than other methods. However, the calculation of the Wavelet Resolution Merge is more complicated than the Principle Component and it is not comfortable to use it because of the more conditions for implementation of the Wavelet Resolution Merge than the Principle Component method. There are some errors in the results of this paper because shoreline was detected by MNDWI. But the problem of evaluating which method is more effective for detection of shoreline will remain unaffected.

## References

- [1] Buchanan, M. D. (1979). Effective Utilization of Color in Multidimensional Data Presentation. *Paper presented at the Society of Photo-Optical Engineers*, 199, 9-19.
- [2] Chavez, P. S., Jr., Sides, S. C., & Anderson, J. A. (1991). Comparison of Three Different Methods to Merge Multiresolution and Multispectral Data: Landsat TM and SPOT Panchromatic. *Photogrammetric Engineering & Remote Sensing*, 57(3), 295-303.
- [3] Crippen, R. E. (1987). The Regression Intersection Method of Adjusting Image Data for Band Ratioing. *International Journal of Remote Sensing*, 8(2), 137-155.
- [4] Crippen, R. E. (1989). A Simple Spatial Filtering Routine for the Cosmetic Removal of Scan-Line Noise from Landsat TM P-Tape Imagery. *Photogrammetric Engineering & Remote Sensing*, 55(3), 327-331.
- [5] Daily, M. (1983). Hue-Saturation-Intensity Split-Spectrum Processing of Seasat Radar Imagery. *Photogrammetric Engineering & Remote Sensing*, 49(3), 349-355.
- [6] Frazier, P. S., & Page, K. J. (2000). Water Body Detection and Delineation with Landsat TM Data. *Photogrammetric Engineering and Remote Sensing*, 66(12), 1461-1467.
- [7] Garcia-Rubio, C., Huntley, D., & Russell, P. (2014). Evaluating shoreline identification using optical satellite images. *Marine Geology*, 359(2015), 96-105.
- [8] Ghoneim, E., Mashaly, J., Gamble, D., Halls, J., & AbuBakr, M. (2014). Nile Delta exhibited a spatial reversal in the rates of shoreline retreat on the Rosetta promontory comparing pre- and post-beach protection. *Geomorphology*, 228(2015), 1-14.
- [9] Kloiber, S. M., Brezonik, P. L., & Bauer, M. E. (2002). Application of Landsat Imagery to Regional scale Assessment of Lake Clarity. *Water Research*, 36, 4330-4340.
- [10] Kong, D. X., Miao, C. Y., Borthwick, A. G. L., Duan, Q. Y., Liu, H., Sun, Q. H., Ye, A. Z., Di, Z. H., & Gong, W. (2014). Evolution of the Yellow River Delta and its relationship with runoff and sediment load from 1983 to 2011. *Journal of Hydrology*, 520(2015), 157-167.
- [11] Lemeshefsky, George P. (1999). Multispectral multisensor image fusion using wavelet transforms. in *Visual Image Processing VIII*, S. K. Park and R. Juday, Ed., Proc SPIE 3716, 214-222.
- [12] Liu, J. G., & Mason, P. J. (2009). Essential Image Processing and GIS for Remote Sensing, Wiley-Blackwell, London, 37-134.
- [13] McFeeters, S. K. (1996) The Use of Normalized Difference Water Index (NDWI) in the Delineation of Open Water Features. *International Journal of Remote Sensing*, 17(7), 1425-1432.
- [14] Schott, J. R. (2007). Remote Sensing the Image Chain Approach, 2nd Edition, OXFORD UNIVERSITY PRESS, 405-411.

- [15] Vijay, P. S., Nicolas, H. Y., & Roger L. K. (2008). An Efficient Pan-Sharpener Method via a Combined Adaptive PCA Approach and Contourlets, *IEEE Trans. Geosci. Remote Sens.*, 46(5), 1323-1335.
- [16] Welch, R., & Ehlers, W. (1987). Merging Multiresolution SPOT HRV and Landsat TM Data. *Photogrammetric Engineering & Remote Sensing*, 53(3), 301-303.
- [17] Yocky, D. A. (1995). Image merging and data fusion by means of the two-dimensional wavelet transform, *J. Opt. Soc. Amer.*, 12(9), 1834-1845.